





REV.	ECN.NO.	APPD.
A	EXXXXXXXXXX	chenjianhui

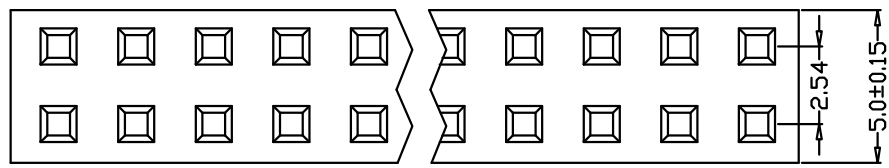

- 技术指标 (Technical Index) :
1. 工作温度 (Temperature range) : -25° C-85° C.
 2. 额定电压 (Rated voltage) : 250V DC/AC (rms)
 3. 额定电流 (Rated current) : 5A AC, DC
 4. 接触阻抗 (CONTACT Resistance) : ≤25MΩ
 5. 耐压值 (Withstanding voltage) : 1500V AC/minute
 6. 绝缘阻抗 (Insulation resistance) ≥1000MΩ

216104-1247-G31018

- G: 镀金G/Fu
- 3: PA46
- 1: 吸塑盒
- 1: 黑色

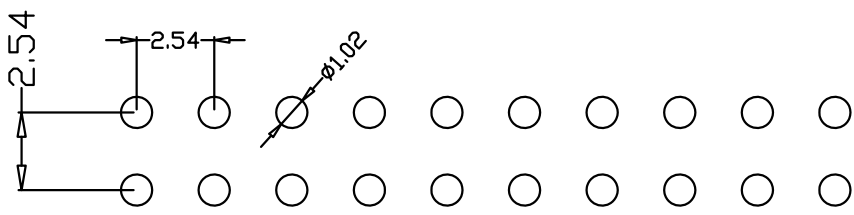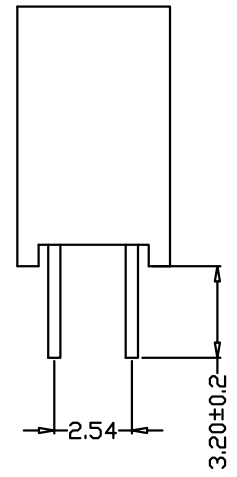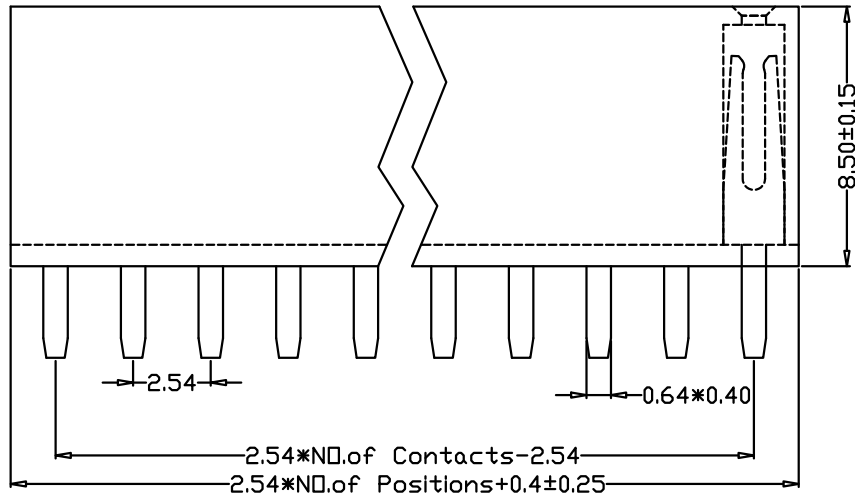

PCB LAYOUT

TOLERANCE UNLESS OTHERWISE SPECIFIED		FLW 深圳市华联威电子科技有限公司			
.XXX ±0.10	.XX ±0.20	.X ±0.30	HUA LIAN WEI TECHNOLOGY ELECTRONICS CO;LTD.		
		.X' ±3'			
		.XX' ±2'			
APPROVED		PART NAME:	排母2.54间距2X5P Y型 H8.5		
CHECKED		PART No:	216104-1247-G31018	C	
DRAWN	chenjianhui	PROJECTION:	UNIT:	SCALE	SHEET
DATE	2022.10.22		mm	1:1	10F1
				REV.	A

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作